


# TOPCART Cartridge filter TKF-110 / 120 / 130-S TKF-110 / 120 / 130-S-222\*\*

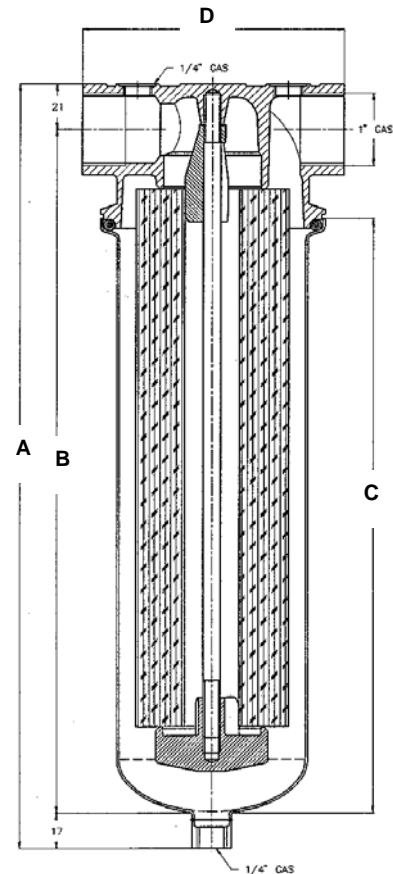

Specification *	TKF-110-S TKF-110-S-222 **	TKF-120-S TKF-120-S-222 **	TKF-130-S TKF-130-S-222 **
Material vessel:	1.4404 (SS316L)		
Material gasket:	PB-DTK-01-OR (also available in EPDM and Viton)		
Connections (N1 / N2):	1" BSP female thread		
Vent (N3) / Drain (N4):	1/4" BSP female thread		
Operating conditions:	25 bar / 90°C		
Filter housing weight (kg)	3	4	5,6
Filter housing volume (liter)	1,7	3,23	4,66
Max. flow rate (l/min)	40	80	120
Cartridge length	9 3/4" = 248 mm	20" = 508 mm	30" = 762 mm
Number of cartridges	1		
Measure A (mm)	354	608	862
Measure B (mm)	316	570	824
Measure C (mm)	275	529	783
Measure D (mm)	120		

\* changes possible w/o notice

\*\* same housing, only without the center rod